

Cat6 U/UTP LSZH NETWORK CABLE

Item ref: 808.015UK





Test Summary: PASS

Date / Time: 01/03/2014 12:56:10pm
Headroom: 4.6 dB (NEXT 36-45)
Test Limit: TIA Cat 6 Perm. Link
 Cable Type: Cat 6 UTP


Operator: 11
 Software Version: 2.5200
 Limits Version: 1.7000
 NVP: 69.0%

Model: DTX-1800
 Main S/N: 9485115
 Remote S/N: 9485116
 Main Adapter: DTX-PLA002
 Remote Adapter: DTX-PLA002



Wire Map (T568B)





Length (ft), Limit 295	[Pair 78]	294
Prop. Delay (ns), Limit 498		447
Delay Skew (ns), Limit 44		14
Resistance (ohms)	[Pair 36]	14.8
Insertion Loss Margin (dB)	[Pair 45]	3.5
Frequency (MHz)	[Pair 45]	248.5
Limit (dB)	[Pair 45]	31.0

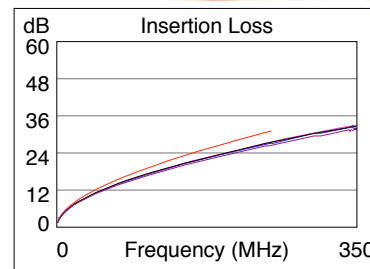



	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
PASS				
Worst Pair	36-78	36-45	36-78	12-36
NEXT (dB)	5.0	4.6	5.0	5.1
Freq. (MHz)	246.0	226.0	246.0	246.0
Limit (dB)	35.5	36.1	35.5	35.5
Worst Pair	36	36	36	36
PS NEXT (dB)	5.4	5.3	5.7	5.3
Freq. (MHz)	216.0	246.0	250.0	246.0
Limit (dB)	33.8	32.8	32.7	32.8

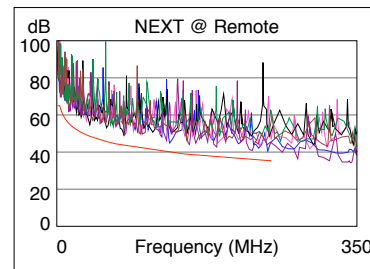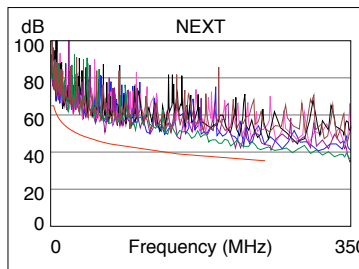



	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
PASS				
Worst Pair	45-36	36-45	45-36	36-45
ACR-F (dB)	2.9	2.6	2.9	2.6
Freq. (MHz)	241.0	241.0	241.0	241.0
Limit (dB)	16.5	16.5	16.5	16.5
Worst Pair	36	45	36	45
PS ACR-F (dB)	5.5	5.6	5.5	5.8
Freq. (MHz)	241.0	231.5	241.0	241.0
Limit (dB)	13.5	13.9	13.5	13.5

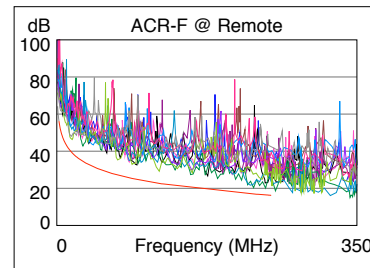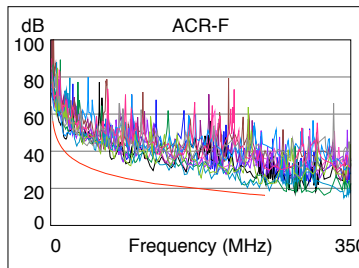

	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
N/A				
Worst Pair	12-36	36-45	36-78	12-36
ACR-N (dB)	6.6	6.0	9.7	9.1
Freq. (MHz)	6.3	4.0	246.0	246.0
Limit (dB)	56.7	60.6	4.6	4.6
Worst Pair	36	36	36	36
PS ACR-N (dB)	7.3	6.0	9.5	9.2
Freq. (MHz)	63.5	4.1	250.0	246.0
Limit (dB)	28.0	58.0	1.6	2.0

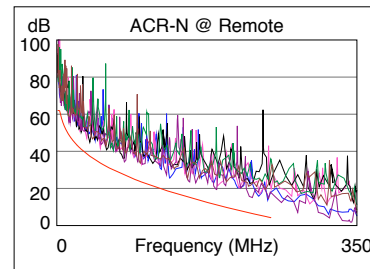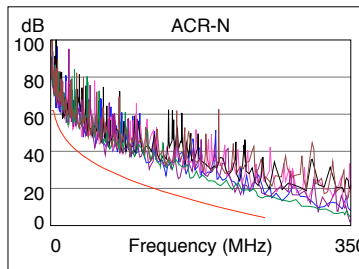

	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
PASS				
Worst Pair	12	78	12	78
RL (dB)	7.2	4.6	7.7	5.0
Freq. (MHz)	99.3	3.6	231.0	217.5
Limit (dB)	14.0	21.0	10.4	10.6

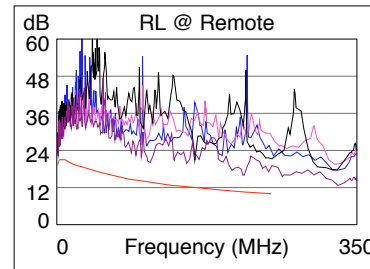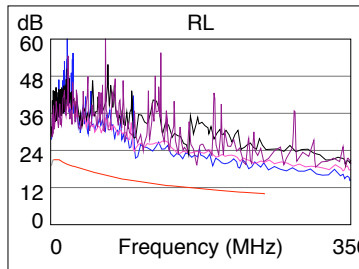

Compliant Network Standards:
 10BASE-T 100BASE-TX 100BASE-T4
 1000BASE-T ATM-25 ATM-51
 ATM-155 100VG-AnyLAN TR-4
 TR-16 Active TR-16 Passive