

# PLEXI CRUNCH

## Owner's Manual

# NUX

Reissue Series

The NUX PLEXI CRUNCH pedal from the Reissue Series offers you high gain distortion tone with the character of the famous hot-roded British valve amps from the golden age of Rock.

### Overview

- Classic British High Gain Tone
- Analog Circuit with 3 Gain Stages
- FETs Simulate the Characteristic Distortion of Tube Amplifiers
- Active TONE Circuitry
- True-bypass Hardware Switching


### Specifications

- Input impedance: 1M Ohms
- Output impedance: 10K Ohms
- Current Draw: < 20 mA
- Power: 9 Volt DC/9V Battery
- Dimensions: 121(L) X 77(W) X 48(D) mm
- Weight: 230g

1. Do not place near heat sources, such as radiators, heat registers, or appliances which produce heat.
2. Guard against objects or liquids entering the enclosure.
3. Refer all servicing to qualified service personnel.
4. Prolonged listening at high volume levels may cause irreparable hearing loss and/or damage. Always be sure to practice "safe listening".

Follow all instructions and heed all warnings  
KEEP THESE INSTRUCTIONS!

### Product Interface

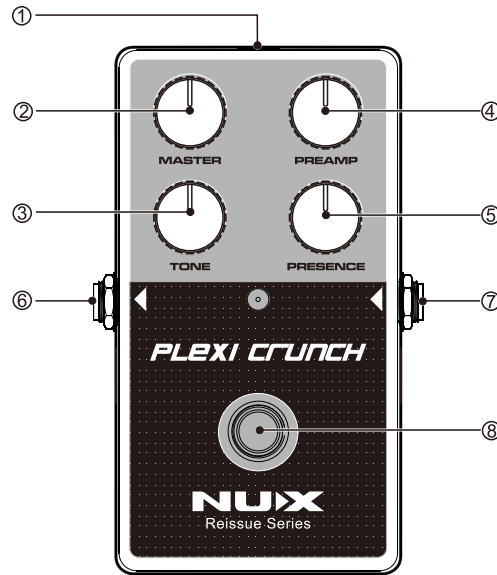

#### 1. POWER Jack

Use a regulated 9V DC adapter with Negative Tip to power this pedal. It's highly recommended using the optional NUX ACD-006 Adaptor. Using an incompatible adaptor may cause noise or mal-function.

#### 2. MASTER Knob

Sets the output level of this pedal.

#### 3. TONE Knob

Controls the middle frequency. Turn it up to increase the mid, or turn it down to scoop the mid.

#### 4. PREAMP Knob

Sets the preamp gain. Turn it up will increase the distortion amount.

#### 5. PRESENCE Knob

Controls the high frequency. Turn it up for brighter tone, or turn it down to get a smooth and mellow sound.

#### 6. OUTPUT Jack

Connect an amplifier into this jack.


#### 7. INPUT Jack

Connect your guitar into this jack. Plugging in this jack switch on the power whether the effect is engaged or bypassed. When not using this pedal, disconnect the cable from this jack to save battery life.

#### 8. ON/OFF Switch

Turns On/Off the effect.

### Installing The Battery



A battery is supplied with the unit. Connect the snap cord to the battery and insert the battery as shown in the drawing. When the battery runs down the sound will change. In such case please replace with new battery. The power comes on when you insert the plug into the INPUT jack. The use of an AC adaptor is recommended as the unit's power consumption is relatively high.

### Accessories

- 9V battery
- Owner's manual
- NUX sticker

\*Specifications and features are subject to change without notice.

### WARNING!-IMPORTANT SAFETY INSTRUCTIONS BEFORE CONNECTING, READ INSTRUCTIONS

**WARNING:** To reduce the risk of fire or electric shock, do not expose this appliance to rain or moisture.

**CAUTION:** To reduce the risk of fire or electric shock, do not remove screws. No user-serviceable parts inside. Refer servicing to qualified service personnel.



The lightning symbol within a triangle means "electrical caution!" It indicates the presence of information about operating voltage and potential risks of electrical shock.



The exclamation point within a triangle means "caution!" Please read the information next to all caution signs.

\* All of the brand and model names mentioned on this page are Trademarks of their respective owners, which are in no way associated or affiliated with NUX Effects and Cherub Technology CO. LTD.



www.nuxaudio.com  
Made in China